

T359A SPECIFICATIONS




CONFIGURATION	
6 X 4	standard
8 X 4, 10 X 4	optional
GVM	
24.1 TONNE LIMIT - 6X4*	
30.1 TONNE LIMIT - 8X4*	
36 TONNE LIMIT - 10X4 *	
* Higher ratings available subject to Application and Engineering approval.	
SUSPENSION	
FRONT - TAPER LEAF, MULTI LEAF / REAR - AIRBAG, MECHANICAL	
TRANSMISSION	
MANUAL, AUTOMATIC & AUTOMATED MANUAL TRANSMISSION (AMT)	

T359A FRONT FRAME HEIGHT (F.F.H) mm			
Front Spring	Tyres		
	11R22.5 R168	275/70 R22.5 R294	295/80 R22.5 R150-II
6.5T Multi	1084	1044	1089
7.2T Taper	1080	1040	1085
12T Taper	1076	1036	1081

T359A REAR FRAME HEIGHT (R.F.H) mm		
Rear Suspension	Tyres	
	11R22.5 M766	275/70 R22.5 M749 ECOPIA
Airglide 400	1027	1024
Airglide 460	1027	1024


DAY CAB

6X4

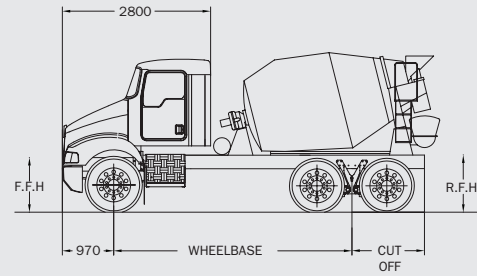


DAY CAB

8X4

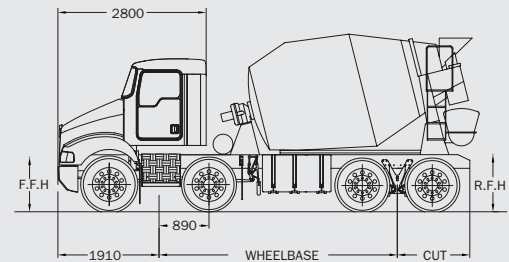

DAY CAB

10X4

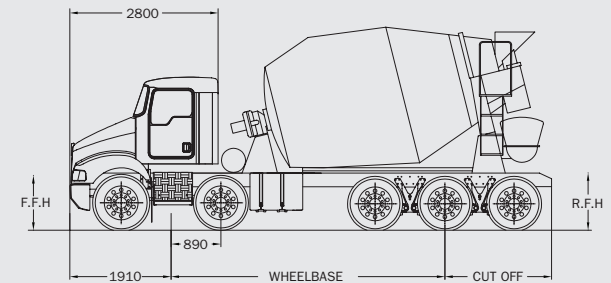

IMPORTANT NOTES

All frame height dimensions are to the top of the frame using 270mm rails.

For illustration purposes different configurations have been used.

Variations will occur due to tare weight differences caused by optional equipment and fuel. Variations of +/- 25mm can be expected on heavy duty trucks.

Heights have been calculated with the tyre in an unladen condition and unless specified Bridgestone tyres have been used in the calculations. Variations will be caused by different tyre manufacturers.

For a wide range of options, contact your Kenworth Dealer.

ENGINE	
ISLE5 - 280 HP / 778 LB-FT TORQUE - SCR	optional
ISLE5 - 320 HP / 996 LB-FT TORQUE - SCR	standard
ISLE5 - 340 HP / 1106 LB-FT TORQUE - SCR	optional
ISLE5 - 360 HP / 1180 LB-FT TORQUE - SCR	optional
ISLE5 - 380 HP / 1254 LB-FT TORQUE - SCR	optional
EXHAUST	
EGP POST MOUNTED	optional
70L ADBLUE UREA TANK LHR	optional
70L ADBLUE UREA TANK RHR	optional
AIR CLEANER	
DONALDSON PLASTIC AIR CLEANER MOUNTED UNDER HOOD	standard
TRANSMISSION - MANUAL	
EATON RTO14909ALL 9+2 SPEED, 1450 LB-FT TORQUE	optional
TRANSMISSION - AUTOMATIC	
ALLISON 3200P 6 SPEED, 1100 LB-FT TORQUE	standard
ALLISON 4440P 6 SPEED, 1310 LB-FT TORQUE	optional
TRANSMISSION - AUTOMATED MANUAL TRANSMISSION (AMT)	
ULTRASHIFT PLUS FO-14E309ALL-VMS 9+2 SPEED, 1450 LB-FT TORQUE	optional
FRONT AXLE	
DANA E-1462I - 6.6T GAWR	standard
DANA DUAL E-1322I - 12T GAWR	optional
MERITOR MFS66-122 - 6.6T GAWR	optional
MERITOR DUAL MFS66-122 13.2T - GAWR	optional

REAR AXLE	
DANA DSH40P - 18.1T GAWR	standard
DANA DSH40P + LAZY - 27.1T GAWR	optional
MERITOR RT40-140GP - 18.1T GAWR	optional
REAR SUSPENSION	
KENWORTH AIRGLIDE 400 - 18.1T GAWR	standard
KENWORTH AIRGLIDE 600 - 27.0T GAWR (10X4 ONLY)	optional
BRAKES	
DRUM	standard
SAFETY SYSTEMS - ELECTRONIC BRAKE SAFETY SYSTEMS (EBSS)	
ABS - ANTILOCK BRAKING SYSTEM	standard
DTC - DRAG TORQUE CONTROL	standard
ATC - AUTOMATIC TRACTION CONTROL	standard
HSA - HILL START ASSIST*	optional
ACB - ACTIVE CRUISE BRAKING	optional
ESP - ELECTRONIC STABILITY PROGRAM	optional
CMS - COLLISION MITIGATION WITH AEB	optional
LDW - LANE DEPARTURE WARNING	optional
*Only available with Eaton UltraShift® PLUS Automated Transmission.	
WHEELS	
ALLOY 10 STUD	standard
FUEL TANKS	
RANGE OF PACKAGES AVAILABLE	
PAINT	
SINGLE COLOUR TO CAB	standard
UP TO 3 COLOURS 6 BREAKS	optional

Australian Kenworths are purpose-built. Each truck designed and manufactured for its intended task and to individual customer requirements. For a wide range of customised options contact your local Kenworth Dealer or go to www.kenworth.com.au

PACCAR Australia Pty Ltd,
64 Canterbury Road,
Bayswater, Victoria 3153
Phone (03) 9721 1500



T359A SP 0618



AUSTRALIAN MADE. WORLD'S BEST.