T659

KENWORTH

DAY CAB

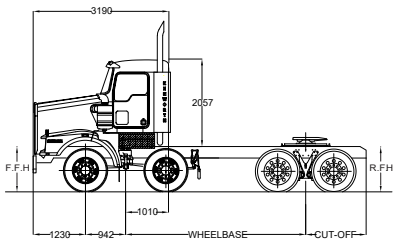

28" FLAT ROOF SLEEPER

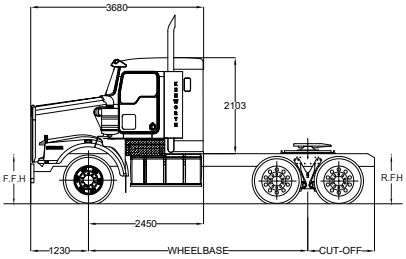

36" AERO ROOF RECESSED BACK SLEEPER

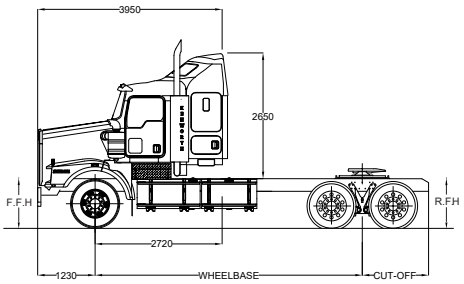

36" MID ROOF RECESSED BACK SLEEPER

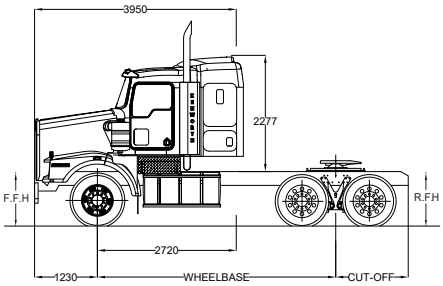

36" AERO ROOF SLEEPER

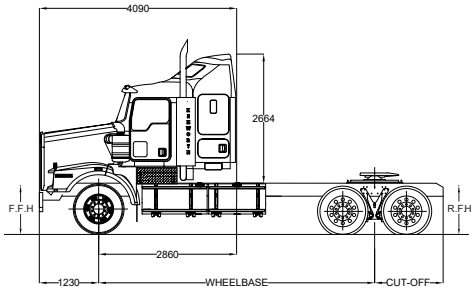

50" AERO ROOF SLEEPER

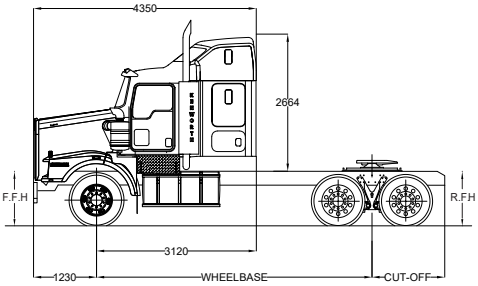

CONFIGURATION

6x4 SINGLE STEER & TANDEM DRIVE	*standard*
8x4# TWIN STEER & TANDEM DRIVE, 8x4# SINGLE STEER & TANDEM + LAZY, 8x6# SINGLE STEER & TRI-DRIVE	*optional*
10x4# TWIN STEER & TANDEM + LAZY, 10x6#, TWIN STEER & TRI-DRIVE	*optional*

GCM

NOMINAL 97 TONNE AND UP TO 180 TONNE BASED ON APPLICATION AND CONFIGURATION##

##Higher GCM ratings available subject to Application and Engineering approval.

SLEEPER

28" INTEGRATED FLAT ROOF	*optional*
36" INTEGRATED MID ROOF RECESSED BACK	*optional*
36" INTEGRATED AERO ROOF RECESSED BACK	*optional*
36" INTEGRATED AERO ROOF	*optional*
50" INTEGRATED AERO ROOF	*optional*
915mm MODULAR FLAT ROOF	*optional*
1270mm MODULAR FLAT ROOF	*optional*
1525mm MODULAR AERO ROOF	*optional*

1525mm AERO MODULAR ROOF SLEEPER

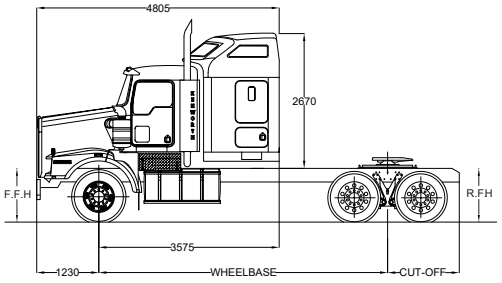

FRONT FRAME HEIGHT (F.F.H) mm

FRONT SPRING	TYRES		
	295/80R 22.5 R154ECO *(standard)*	11R22.5 R168-II *(optional)*	385/65 R22.5 R249 *(optional)*
7.2t TAPER	1072	1068	1085
6.5t MULTI	1082	1078	1095
7.2t MULTI	1083	1079	1096
12.0t TAPER	1069	1065	1082

REAR FRAME HEIGHT (R.F.H) mm

REAR SUSPENSION	TYRES		
	11R22.5 M866 *(standard)*	11R22.5 M822 *(optional)*	275/70 R22.5 M749 *(optional)*
AIRGLIDE AG400 10.5"	1030	1037	985
AIRGLIDE AG460 10.5"	1068	1074	1023
KW6-60A 18t & 21t LOW 10.5"	1096	1052	1068
NEWAY AD246/10 10"	1055	1061	1011

IMPORTANT NOTES:

- Fusion is mandatory on chassis with three or less axles.
- #Fusion is optional on chassis with 4 or more axles. An allowance forward of the bumper/bullbar of 30mm for the fusion radar unit is required for these configurations.
- All frame dimensions are measured to the top of the frame using 270mm rails. Illustrations provided depict varying configurations for demonstration purposes only. Actual dimensions may vary due to differences in tare weight resulting from fitting of optional equipment, postproduction build-up, and fuel loads. On heavy-duty trucks, dimensional variations of up to ±25mm may occur.
- Vehicle heights have been calculated with tyres in an unladen condition; unless otherwise specified, Bridgestone tyres have been used for these calculations. Variations may result when tyres from alternative manufacturers are fitted.
- For more information on the full range of available options, please contact your authorised Kenworth dealer or visit kenworth.com.au

Specifications

X15 CUMMINS ENGINE

CUMMINS X15 EURO VI PERFORMANCE - 525HP / 1850lb-ft TORQUE	*standard*
CUMMINS X15 EURO VI EFFICIENCY - 550HP / 2050lb-ft TORQUE	*optional*
CUMMINS X15 EURO VI EFFICIENCY - 580HP / 2050lb-ft TORQUE	*optional*
CUMMINS X15 EURO VI PERFORMANCE - 565HP / 1850lb-ft TORQUE	*optional*
CUMMINS X15 EURO VI PERFORMANCE - 605HP / 1850lb-ft TORQUE	*optional*
CUMMINS X15 EURO VI PERFORMANCE - 625HP / 2050lb-ft TORQUE	*optional*

KITS

FUEL HAUL & GAS HAUL	

EXHAUST – AFTERTREATMENT

MA RHUC, DUAL SIDE OF CAB EXHAUST	*standard*
MOUNTED RHS IN CHASSIS, SINGLE LH SIDE OF CAB EXHAUST	*optional*
MOUNTED RHS IN CHASSIS - DUAL SIDE OF CAB EXHAUST	*optional*
POST MOUNT RHS - SINGLE EXHAUST	*optional*
MOUNTED RHUC - SINGLE LH SIDE OF CAB EXHAUST	*optional*
MOUNTED RHUC - DUAL SIDE OF CAB EXHAUST	*optional*

AIR CLEANER

DUAL PACCAR 15^ SS AIR CLEANERS - INTEGRATED CAPS (SS COWL MTD AIR CLEANERS)	*standard*
SMA MOUNTED RHUC - DUAL SIDE OF CAB EXHAUST	*optional*

TRANSMISSION - MANUAL

EATON RTLO20918B 18-SPEED, 2050lb-ft TORQUE	*standard*
EATON RTLO22918B 18-SPEED, 2250lb-ft TORQUE	*optional*

TRANSMISSION - AUTOMATED MANUAL TRANSMISSION (AMT)

EATON FO-20E318B-MXP ULTRASHIFT PLUS, 18-SPEED, 2050lb-ft TORQUE	*optional*
EATON FO-22E318B-MXP ULTRASHIFT PLUS, 18-SPEED, 2250lb-ft TORQUE	*optional*

FRONT AXLE

DANA SPICER E-1462I - 6.6t GAWR	*standard*
DANA SPICER D2000F - 9.1t GAWR	*optional*
DANA SPICER DUAL E-1462I TWIN STEER - 13.2t GAWR	*optional*
MERITOR MFS66-122 - 6.6t GAWR	*optional*
MERITOR MFS73 - 7.3t GAWR	*optional*
MERITOR MFS75 - 7.5t GAWR	*optional*
MERITOR DUAL MFS66-122 TWIN STEER - 13.2t GAWR	*optional*

REAR SUSPENSION

AIRGLIDE 400 - 20.9t GAWR	*standard*
AIRGLIDE 460 - 20.9t GAWR	*optional*
AIRGLIDE 460 & TOUGHLIFT - 22.0t GAWR	*optional*
AIRGLIDE 690 - 31.35t GAWR	*optional*
HENDRICKSON PAX462 - 21.0t GAWR	*optional*
HENDRICKSON PAX522 - 23.5t GAWR	*optional*
HENDRICKSON PAX462 & TOUGHLIFT FMT - 27.1t GAWR	*optional*
HENDRICKSON PAX522 & TOUGHLIFT FMT - 27.1t GAWR	*optional*
KW6-60A 18 LOW - 18.5t GAWR	*optional*
KW6-60A 25 LOW - 25.0t GAWR	*optional*
NEWAY AD246/10 - 20.8t GAWR	*optional*
NEWAY AD260/10 - 27.2t GAWR	*optional*
NEWAY AD369/10 - 31.2t GAWR	*optional*
NEWAY AD378/10 - 31.2t GAWR	*optional*

FRONT SUSPENSION

7.2t TAPER LEAF	*standard*
6.6t MULTI LEAF	*optional*
7.2t MULTI LEAF	*optional*
12.0t TAPER LEAF FRONT SPRINGS, 3 LEAF LOAD SHARE TWIN STEER	*optional*

REAR AXLE

DANA SPICER D46-170 - 20.9t GAWR	*standard*
DANA SPICER D46-170 & TOUGHLIFT FMT - 27.0t GAWR	*optional*
DANA SPICER D50-170 - 22.7t GAWR	*optional*
DANA SPICER D50-170 & TOUGHLIFT FMT - 27.0t GAWR	*optional*
DANA SPICER D52-190 - 23.6t GAWR	*optional*
DANA SPICER D52-190 & TOUGHLIFT FMT - 27.0t GAWR	*optional*
DANA SPICER D52-590FL - 23.6t GAWR	*optional*
DANA SPICER T78-190FL - 35.4t GAWR	*optional*
DANA SPICER T78-590FL - 35.4t GAWR	*optional*
MERITOR MT21-165GP - 20.9t GAWR	*optional*
MERITOR MT21-165GP & MR-09-004 NON-LIFTABLE TAG LAZY AXLE - 27.2t GAWR	*optional*
MERITOR MT21-165GP & TOUGHLIFT FMT - 27.0t GAWR	*optional*
MERITOR MT23-168GP - 22.7t GAWR	*optional*
MERITOR MT23-168GP & TOUGHLIFT FMT - 27.0t GAWR	*optional*
MERITOR RT52-185G - 23.6t GAWR	*optional*
MERITOR RT52-185G & TOUGHLIFT FMT - 27.0T GAWR	*optional*
MERITOR RZ78-188G - 29.5t GAWR	*optional*
MERITOR P610-38 - 38.0t GAWR	*optional*
SISU FR2P-32 32.0t GAWR	*optional*
SISU FR3P-48 48.0t GAWR	*optional*

BRAKES

DRUM	*standard*
DISC	*optional*

SAFETY SYSTEMS

ABS – ANTILOCK BRAKING SYSTEM	*standard*
DTC – DRAG TORQUE CONTROL	*standard*
ATC – AUTOMATIC TRACTION CONTROL	*standard*
ESP – ELECTRONIC STABILITY PROGRAM**	*standard*
HSA – HILL START ASSIST*	*optional*
TRM – TRAILER RESPONSE MANAGEMENT	*optional*
SOD – BLINDSPOTTER SIDE OBJECT DETECTION SYSTEM	*optional*

FUSION INTEGRATED ACTIVE SAFETY SYSTEMS**

INTEGRATES ADAPTIVE CRUISE CONTROL WITH BRAKING, STATIONARY VEHICLE BRAKING, COLLISION MITIGATION, DRIVER ALERTS, LANE DEPARTURE WARNING, HIGHWAY DEPARTURE WARNING & BRAKING, ADVANCED EMERGENCY BRAKING [AEBS] & MULTI LANE AUTONOMOUS EMERGENCY BRAKING**

*Note: *Only with Automated Manual Transmission (AMT). **Standard on 6x4. Exceptions apply depending on axle configuration/application.*

PACCAR CONNECT

12 MONTH BASE SUBSCRIPTION TO PACCAR CONNECT GPS TELEMATICS	*standard*

WHEELS

ALLOY 10 STUD - RANGE OF FINISHES AVAILABLE	*standard*

FUEL TANKS

RANGE OF PACKAGES AND FINISHES AVAILABLE	

ADBLUE

170L 625mm DIA UREA TANK	*standard*
100L 625mm DIA UREA TANK	*optional*
300L 625mm DIA UREA TANK	*optional*
350L 625mm DIA UREA TANK	*optional*
160L RECTANGULAR UREA TANK	*optional*
225L RECTANGULAR UREA TANK	*optional*

PAINT

SINGLE COLOUR TO CAB	*standard*
UP TO 3 COLOURS 6 BREAKS	*optional*

KENWORTH

64 Canterbury Road, Bayswater North VIC 3153 | (03) 9721 1500 | kenworth.com.au